



VB-FULLAIR-2C

making everyday smoother



airsuspension



- Increased comfort • Better driveability • More safety



OPEL MOVANO

X62 RWD rearaxle

PRODUCT SHEET


PRODUCT SHEET

The Opel Movano is available with rear axle air suspension. The Movano is extremely suited for the use of air suspension systems and our VB-FullAir-2C is available for new and used vehicles. This newly developed rear axle air suspension, from VB-Airsuspension, is available as an after-market option through the VB-Airsuspension dealers and Opel network.



VB-FullAir-2C system

The VB-FullAir, a full-air rear-axle air-suspension, has an electronic system named VB-ASCU (VB-Air Suspension Control Unit), which automatically monitors and adjusts the height level of the vehicle. This constant monitoring and adjusting (independent of the load, in the longitudinal and lateral direction and relatively independent of centre gravity height) will automatically contribute to a safe vehicle behaviour and a better comfort. The vehicle may not be overloaded.

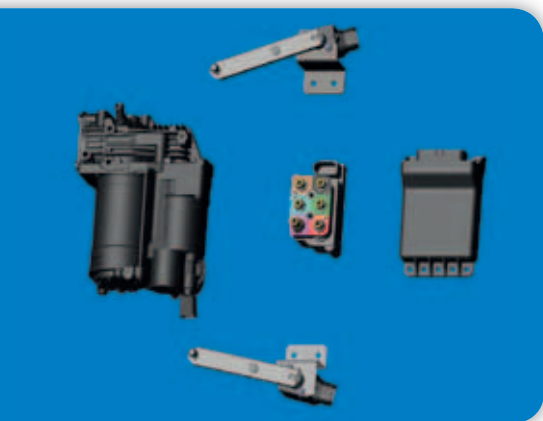

Software

The electronic part of the rear axle air suspension is compatible with the vehicle's main electrical system. Various software variants create the possibility to adapt the VB-FullAir-2C air-suspension to the specific use of the vehicle.

Changing height

The vehicle level can be changed manually with the standard handheld when the vehicle stands still; therefore lowering of the chassis/ load platform is one of the systems standard possibilities.

Dealer:



Advantages VB-FullAir-2C:

- Improved suspension comfort
- Constant ride height
- Improved road handling and stability
- Increased protection of vulnerable / sensitive goods
- Less impact for passengers
- Kneeling facility
- Less wear of tyres / brakes
- Environmentally friendlier, less CO² emission
- Spare wheel stays available under vehicle

Applications

The new Opel Movano will be used for a wide range of applications where air-suspension is essential. For example: passenger transport, disabled persons transport, rescue vehicles, motorhomes, car transporters and for the transport of shock-sensitive products. For these and more usages, and individual needs, our VB-FullAir-2C is the right solution.

Supply and service

The air-suspension of the Opel Movano can be supplied and serviced by VB-Airsuspension dealers and the Opel dealer organisation.

VB-Airsuspension data*:

Standard ride-height (unloaded)	675 mm
Standard ride-height (maximum load)	550 mm
Rideheight with VB-FullAir-2C	655 mm
Highest position	+65 mm
Lowest position	-135 mm

* Indicative measures, for information only. Exact values dependant of wheelbase, vehicle load and tyre size and pressure. Vehicle height measured on the loading floor at the rear of the vehicle.
Attention!! When ordering the vehicle, please always order factory option KPD!!